
V025–30 A Introduction

BXSI

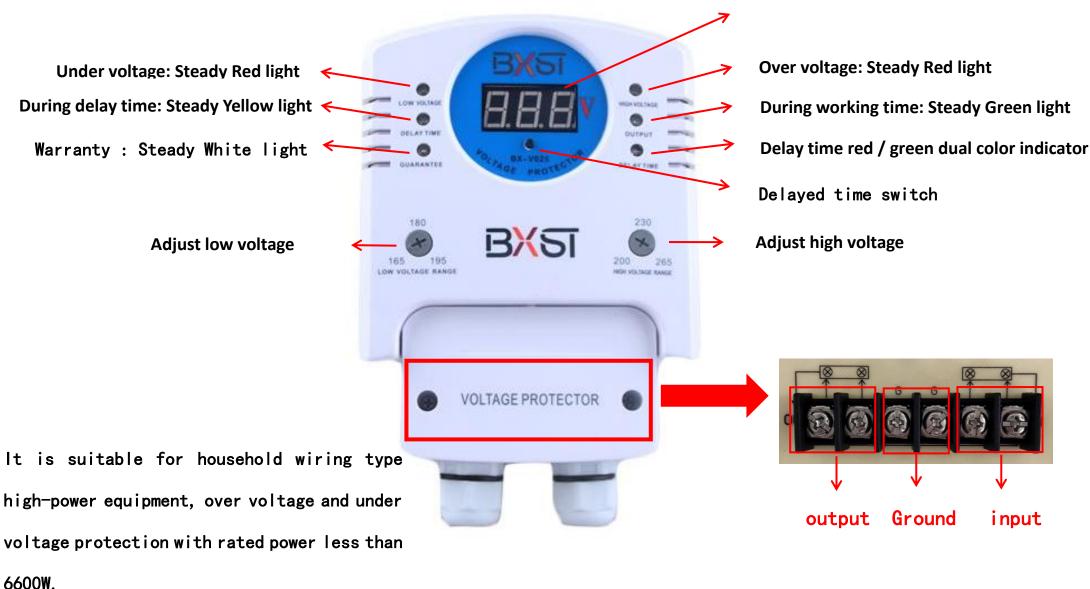

Visual window showing product working status

■Specification

Working voltage:	220VAC
Electric frequency:	50HZ-60HZ
Under voltage:	165-195VAC(Adjustable)
Over voltage:	200-265VAC(Adjustable)
Delayed Time:	15s/3min(Adjustable)
Max Working Current:	30A
Warranty time:	1 year
Working Environment:	0°C~80°C
Material Of Cover:	PC Flame retardant
Size:	172*130*51mm
Dimension Of Carton:	

Features

• Over/under voltage protector: When the voltage exceeds the limit, it will automatically cut off the power to prevent the electrical appliances being damaged by the too low or too high voltage.

• Adjustable threaded bolt: Users can adjust the high/low voltage and delay time to meet their needs.

• Visual window: real-time display of product working status, eye-catching.

• Flame retardant material: Be able to reach the experimental standards of evel test of UL94-5VA..

■Warning

*The total power of connected electrical equipment shall not exceed the rated power.

*Do not use this product in damp or not ventilated environment.

*Non-professionals do not open, change, repair the product.

* Poor connection of the front terminal or poor connection of the plug may cause a danger.

*Prohibition of combustion and keep away from fire.

