



# V025-60 A Introduction

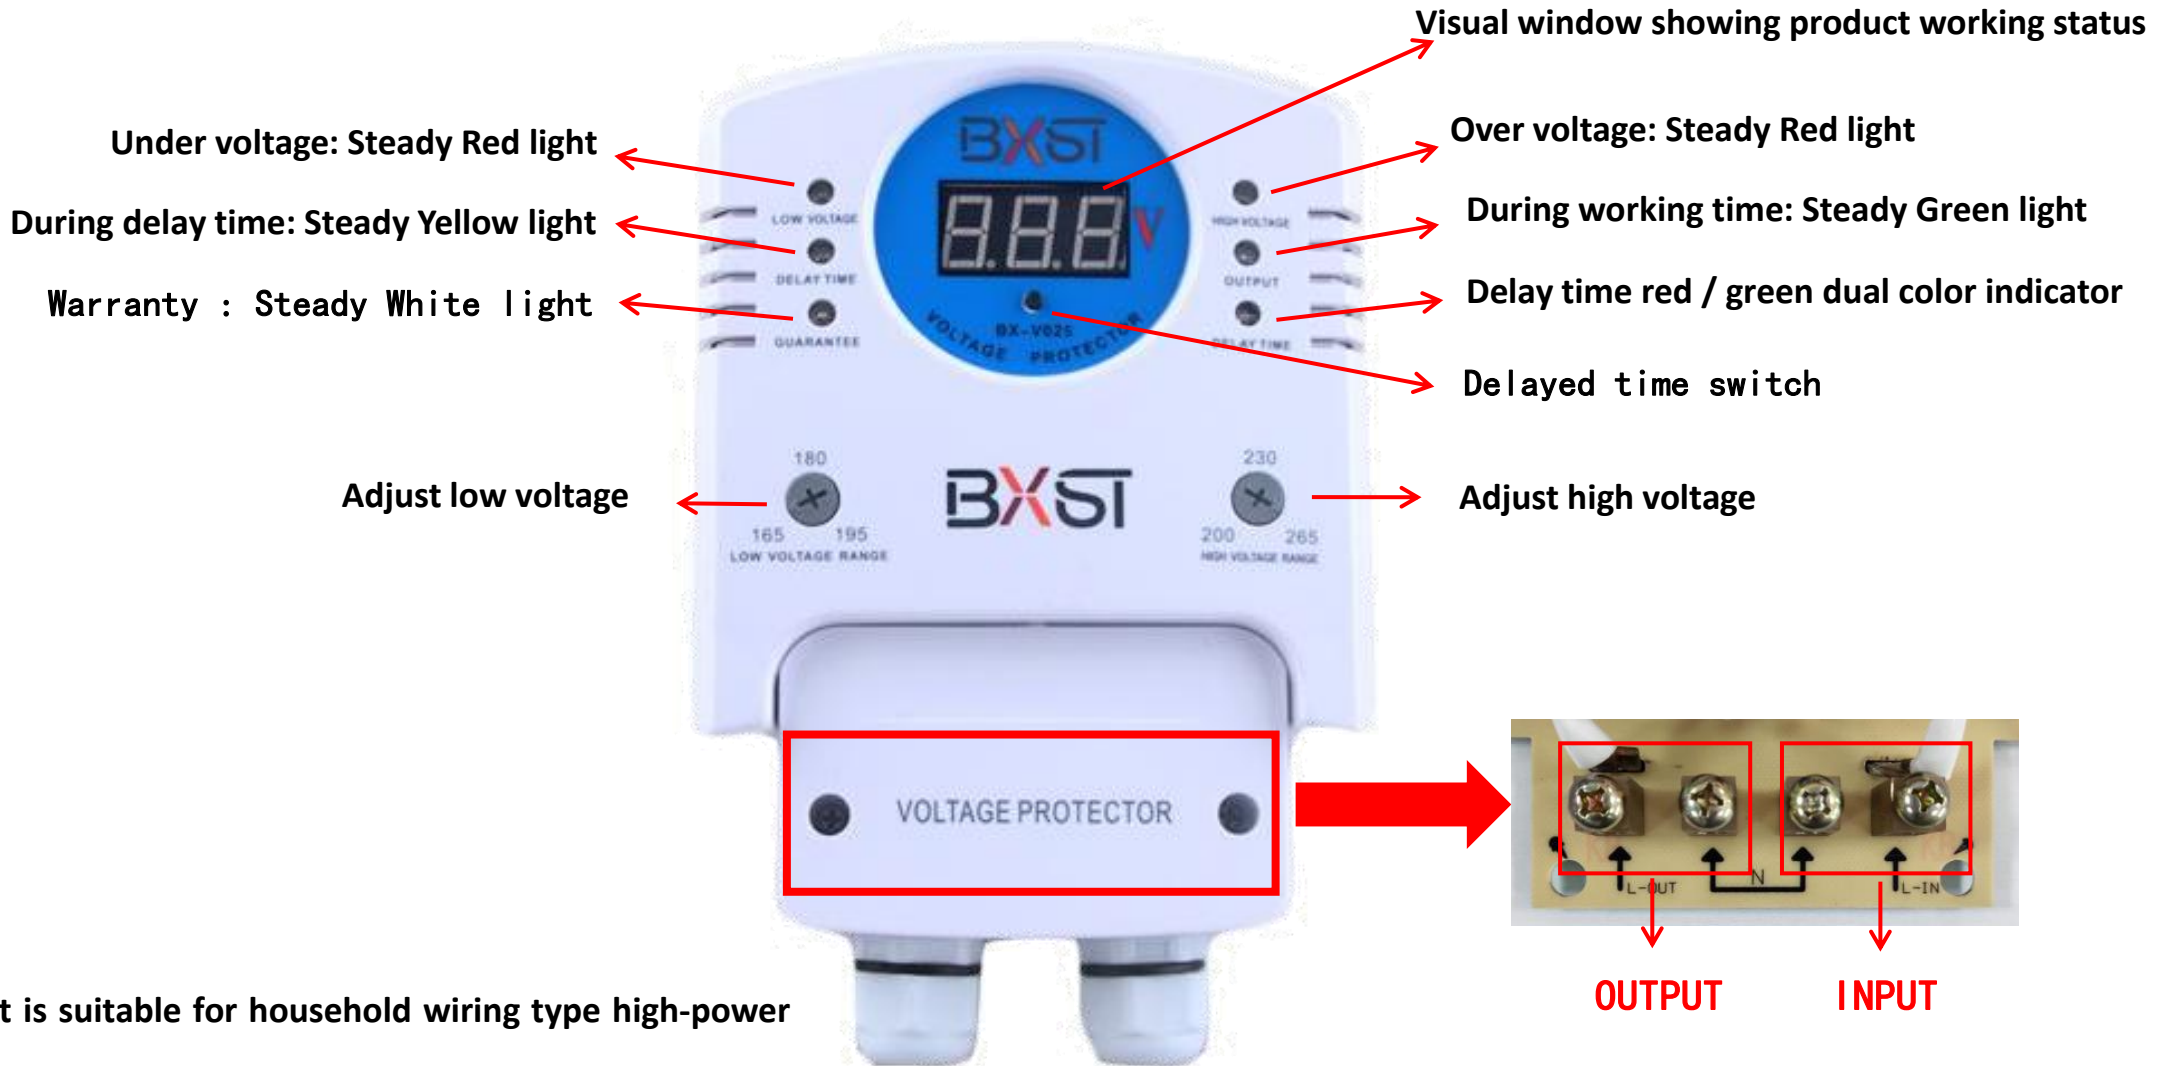

It is suitable for household wiring type high-power equipment, over voltage and under voltage protection with rated power less than 13200W.

## ■Specification

<b>Working voltage:</b>	<b>220VAC</b>
<b>Electric frequency:</b>	<b>50HZ-60HZ</b>
<b>Under voltage:</b>	<b>165-195VAC (Adjustable)</b>
<b>Over voltage:</b>	<b>200-265VAC (Adjustable)</b>
<b>Delayed Time:</b>	<b>15s/3min (Adjustable)</b>
<b>Max Working Current:</b>	<b>60A</b>
<b>Warranty time:</b>	<b>1 year</b>
<b>Working Environment:</b>	<b>-10°C~55°C</b>
<b>Material Of Cover:</b>	<b>PC Flame retardant</b>
<b>Size:</b>	<b>172*130*51mm</b>
<b>Dimension Of Carton:</b>	<b>50×29×31cm</b>

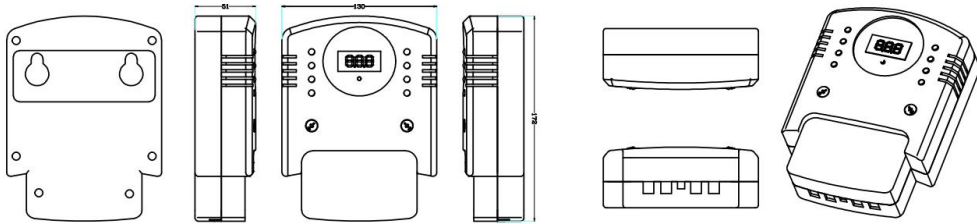

## ■Features

- Over/under voltage protector: When the voltage exceeds the limit, it will automatically cut off the power to prevent the electrical appliances being damaged by the too low or too high voltage.
- Adjustable threaded bolt: Users can adjust the high/low voltage and delay time to meet their needs.
- Visual window: real-time display of product working status, eye-catching.
- Flame retardant material: Be able to reach the experimental standards of level test of UL94-5VA..

## ■Warning

- ※The total power of connected electrical equipment shall not exceed the rated power.
- ※Do not use this product in damp or not ventilated environment.
- ※Non-professionals do not open, change, repair the product.
- ※Poor connection of the front terminal or poor connection of the plug may cause a danger.
- ※Prohibition of combustion and keep away from fire.