


# BX-V008 Voltage protector

BXST

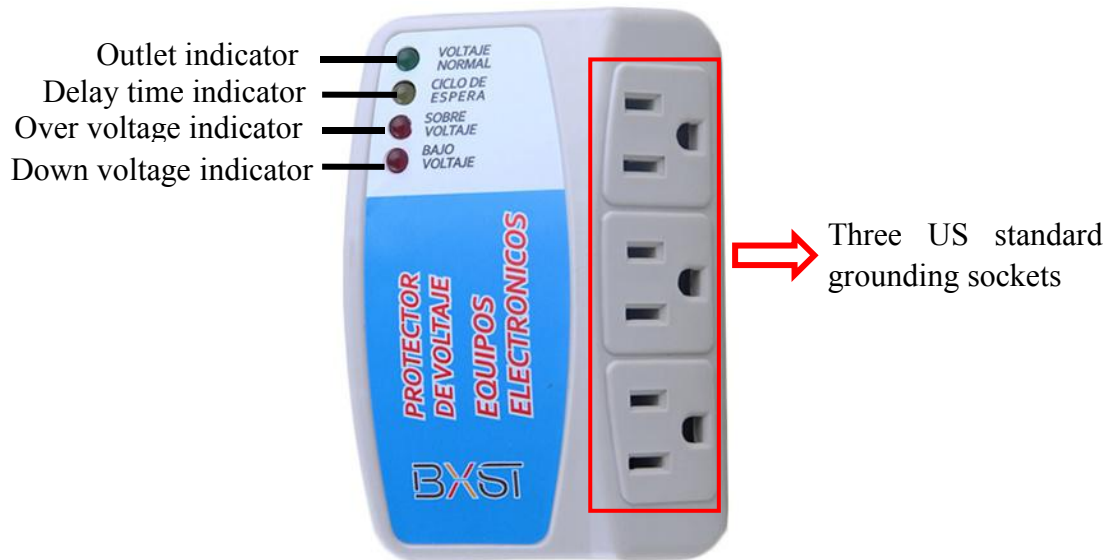

## ■Features


- Over/down voltage protector: When the voltage exceeds the limit, it will automatically cut off the power to prevent the electrical appliances being damaged for too low or too high voltage.
- Lightning Protection: Instantaneous voltage exceeds the limit, the product will protect the electrical appliance against excessive voltage damage automatically and quickly.
- phosphor bronze: with good electrical conductivity, corrosion resistance and wear resistance.
- flame retardant material: reach the level test experimental standards of UL94-5VA..

## ■Introduction

BX-V008 is hot-sold voltage protector in South America. It's used for TV, PC, refrigerator and home appliance which power is less than 1440W.

## ■Specification

- Working voltage: 120VAC/50HZ-60HZ
- Down voltage: 90VAC
- Over voltage: 135VAC
- Working current: 12A (7863BTU) 1440W MAX
- Delay time: 30secs/3mins
- Joule: 140J
- Temperature: -5°C ~ +55°C
- Weight: 138g
- Size: 114\*38\*79.5mm
- material: Flame retardant PC
- Package: 48\*47\*37cm/double blister/50pcs per carton

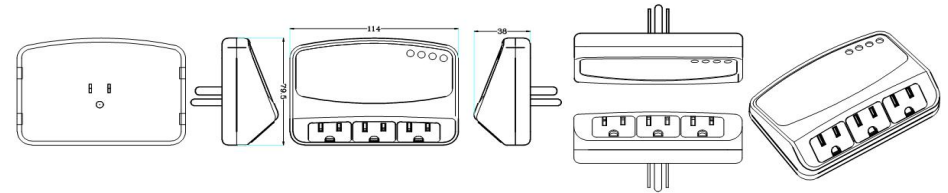

## ■Warning

- ※The total power of connected electrical equipment shall not exceed the rated power.
- ※ Do not use this product in damp or not ventilated environment.
- ※ Non-professionals do not open, change, repair the product.
- ※ Poor contact at the front or poor contact of the plug may cause a danger.