■BX-V078 voltage protector

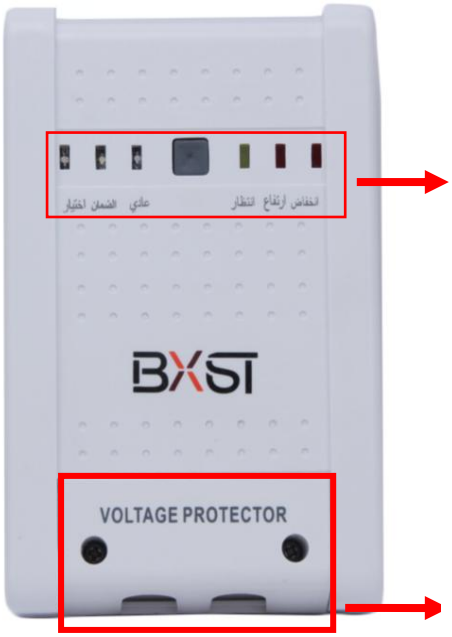

Indicator description(from left side):

1.delay time option indicator

2.warranty indicator

3.output indicator

4.waiting indicator

5.high protection indicator

6.low protection indicator

Wiring description(from left side):

1.OUT-L

2.PUBLIC -N

3.PUBLIC -N

4.IN-L

■Features

- Over/down voltage protector: When the voltage exceeds the limit, it will automatically cut off the power to prevent the electrical appliances being damaged for too low or too high voltage.
- Delay time option:choose the different delay time aimed at different appliance.
- Warranty: The warranty light is powered on for one year, when it is not covered by the warranty, the light will be off.
- Visualization window: The digital display shows the current working status clearly and conspicuously.
- Flame retardant material: reach the level test experimental standards of UL94-5VA..

■Introduction

BX-V078 is the hot sold high power voltage protector. It's used for refrigerator、water heater and home appliance which power is less than 6600W.

■Specification

- Working voltage: 220VAC/50HZ-60HZ
- Under voltage: 165VAC
- Over voltage: 260VAC
- Working current: 30A (6600WMAX)
- Delay time: 5segs/3mins（switch button）
- Warranty: 1years
- Temperature: -5˚C～+55˚C
- Weight: 165g
- Size: 84*34*130mm
- Material: Flame retardant PC
- Package: 50.6*30.5*26cm（60pcs/white box）
  48*47*37cm （50pcs/double blister）

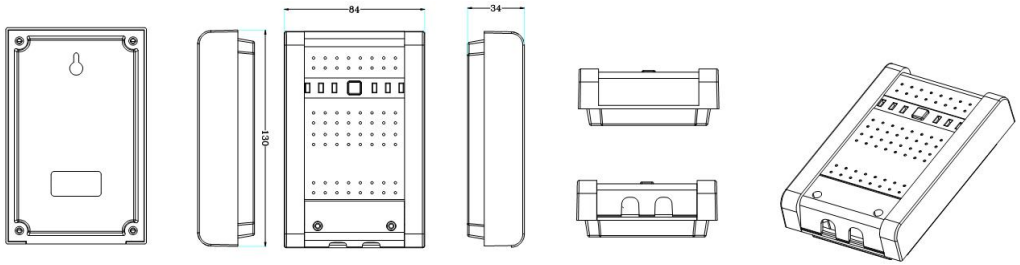

■Warning

※The total power of connected electrical equipment shall not exceed the rated power.

※ Do not use this product in damp or not ventilated environment.

※ Non-professionals do not open, change, repair the product.

※ Poor connection of the front terminal or poor connection of the plug may cause a danger.