


■BX-V003 voltage protector



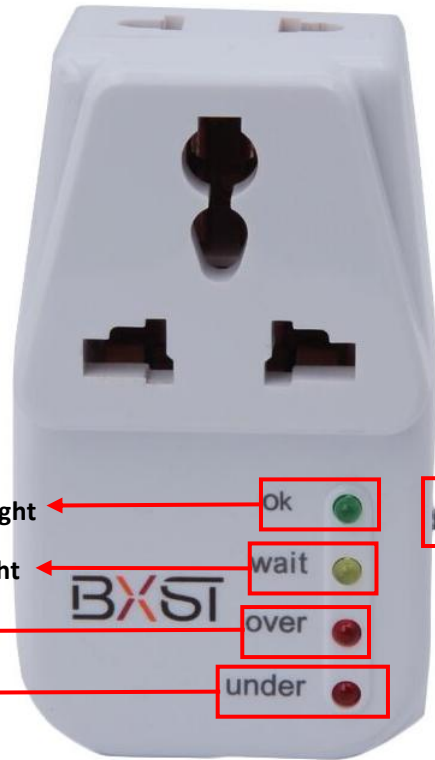


During working time: Steady Green light

During delay time: Steady Yellow light

Over Voltage: Steady Red light

Under voltage: Steady Red light





Adjust Key for delayed time:5s/3mins

■Introduction

BX-V003 is a hot-sold high/low voltage protector in the Africa. It applies for TV, computer, refrigerator and etc. The rated power of this product is less than 2860W.

■Specification

- Working voltage: 220VAC/50HZ-60HZ
- Under voltage: 165V
- Over voltage: 260V
- Working current: 13A
- Power: 2860W
- Delay time: 5s/3mins
- Temperature: -5°C~+55°C
- Material: Flame retardant PC



■Features

- Over/under voltage protector: When the voltage exceeds the limit, it will automatically cut off the power to prevent the electrical appliances being damaged by the too low or too high voltage.
- Phosphor bronze: with the advantages of good electrical conductivity, corrosion resistance and wear resistance.
- Flame retardant material: Be able to reach the experimental standards of level test of UL94-5VA..

■Warning

- ※The total power of connected electrical equipment shall not exceed the rated power.
- ※ Do not use this product in damp or not ventilated environment.
- ※ Non-professionals do not open, change, repair the product.
- ※ Poor connection of the front terminal or poor connection of the plug may cause a danger.